



Outdoors fingerpost, posts

Fingerpost

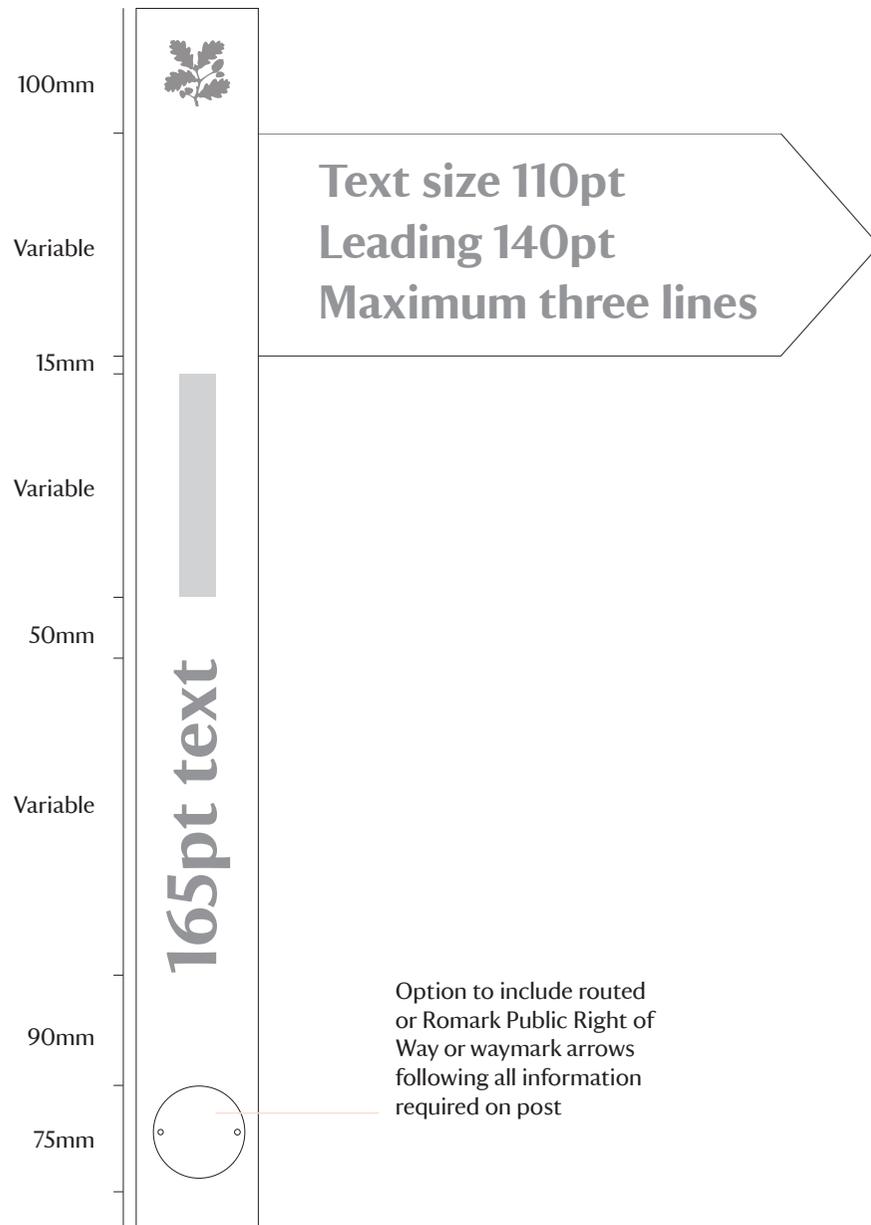

- Posts from FSC certified oak, 3mm flat cut 60mm (width) oak leaf symbol routed at the top of all posts with 3mm 45° chamfer applied to the top of post
- All timber to have sanded edges
- Size large, and waymark posts 100x100mm post profile
- Size small 80x80mm post profile
- Size large ground clearance (to lowest pointer arm) variable – max 2100mm, min 1800mm
- Size small and waymark post ground clearance (fingerpost, to lowest pointer arm, waymark post, overall height) variable – max 1400mm, min 1000mm
- All posts have option to receive 60° routed text and 3mm flat cut directional arrow, arrows have option of colour infill to suit requirement
- For specific size and spacing guidance see below

Waymark post

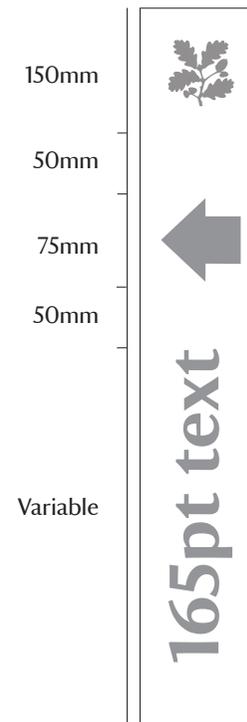

Outdoors fingerpost, pointers

- Posts are morticed to accept 30mm thick smooth planed FSC certified oak pointer arms with variable height and width (within limits) to suit content
- Pointer arms profile to be 90°
- Distance between lifts 15mm
- Maximum of 1 pointer arm on each side of post, 3 lines of text per pointer
- Pointer arms can be single or double sided with content routed using 60° cutter
- Pointer arms to range to centre point on post
- Pointer arms to be fitted using recessed A2 stainless #10x70mm woodscrews with matching timber Ø12mm plugs sanded flush to post
- For specific size and spacing guidance see below

